



with

GENERALE
S i s t e m i | Country
Partner
for Italy




ACCESSORY PRODUCTS


TBS CONTROLLER SMART

Versatile indoor controller as interface with door controls, alarm system and other third-party devices.

- 4 Relays (NO/NC selectable with 3 contacts, controlled by TBS readers)
- 4 Digital Input (monitored by TBS readers)
- 4 Digital Output (controlled by TBS readers)
- Interface to TBS readers via RS-485 or LAN, password protected
- Network ready
- Easy installation (DIN rail clamp included) and cabling

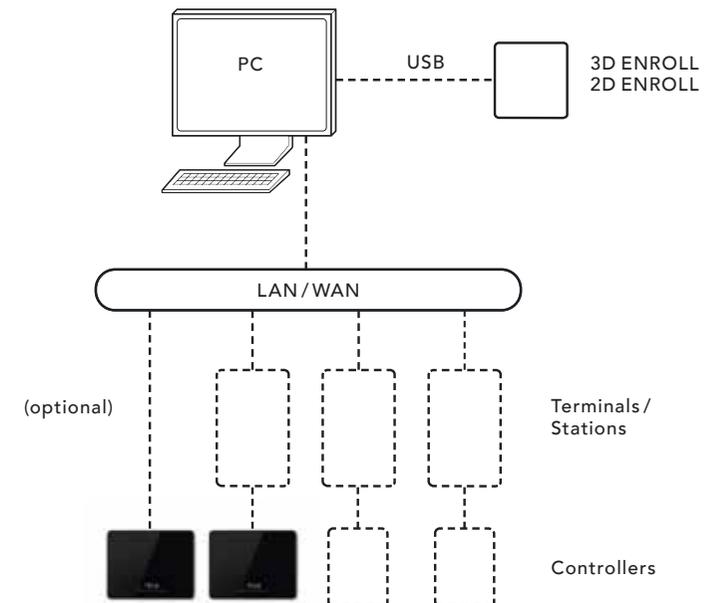

TBS CONTROLLER SMART

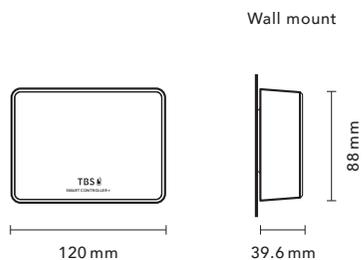

CPU	ARM Cortex-A53 1.2 GHz Quad Core
RAM	1 GB
Flash	4 GB (MicroSD)
Connectivity	1 × LAN 10/100 Mbps (RJ45) 4 × USB 2.0
Ports	4 × Relay output with switching capacity 60W, 220VDC or 125VAC 4 × General Purpose Input (GPIN) 4 × General Purpose Output (GPOUT)
Operating System	Embedded Linux
Software	Web Interface for easy configuration
Certifications	CE
Operating Temperature	-20–60°C
Power	12–24 VDC, Power Consumption max. 3W (idle 1.4W)
Dimensions	120 × 80 × 39.6, 0.40 kg